

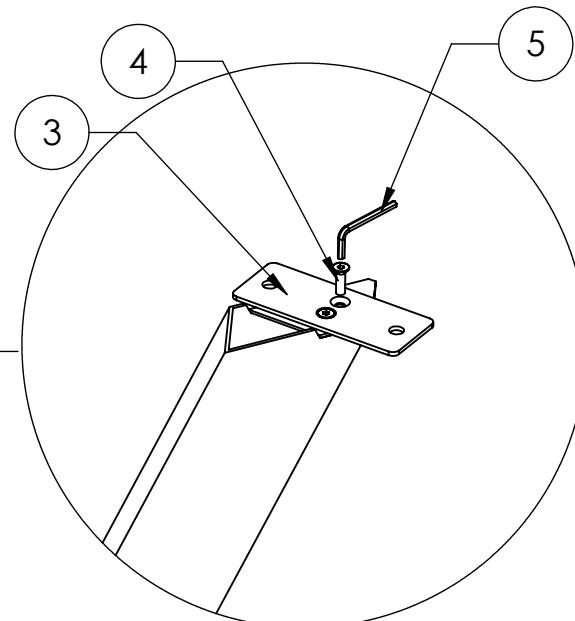


COMPONENT LIST			
1		LEG 1	2 PCS
2		LEG 2	1 PCS
3		CONNECTOR	3 PCS
4		JF-BOLT M6X20	6 PCS
5		L-KEY	1 PCS



STEP 1

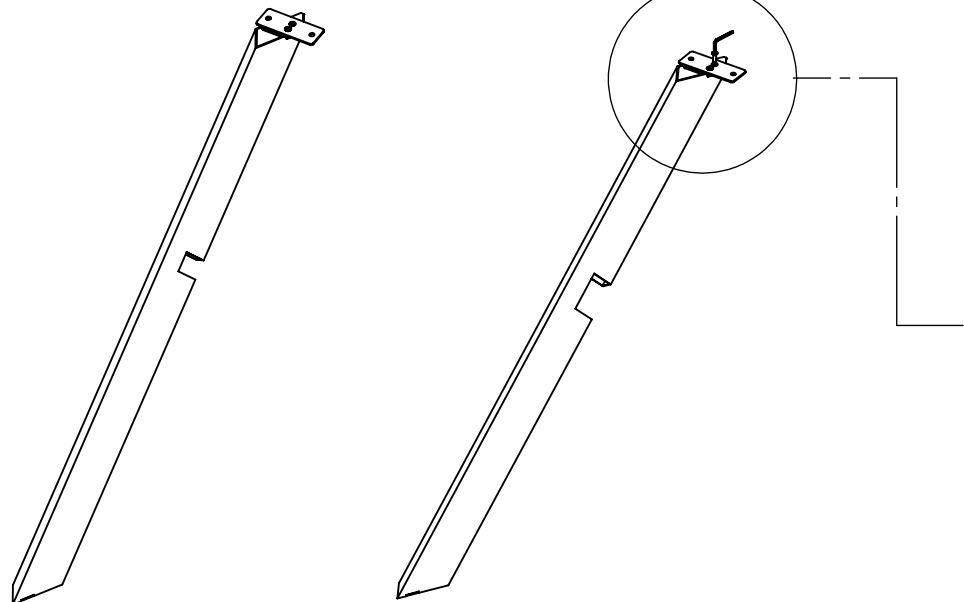



STEP 2

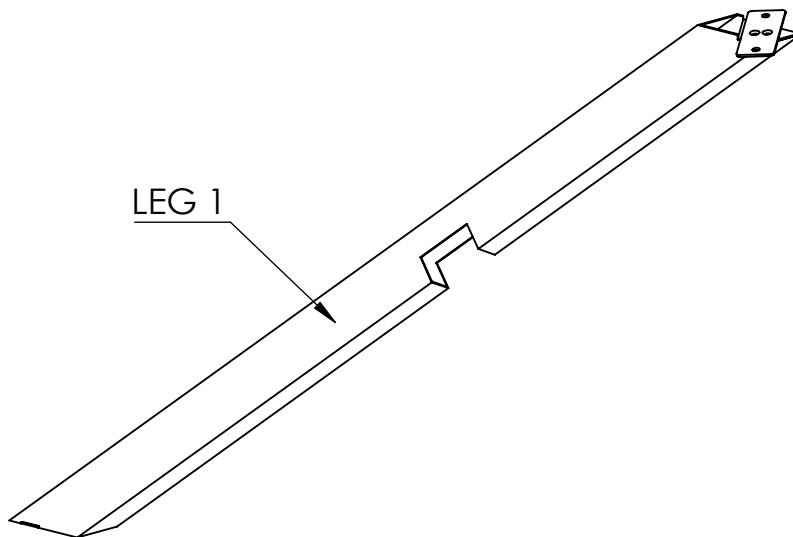

STEP 3

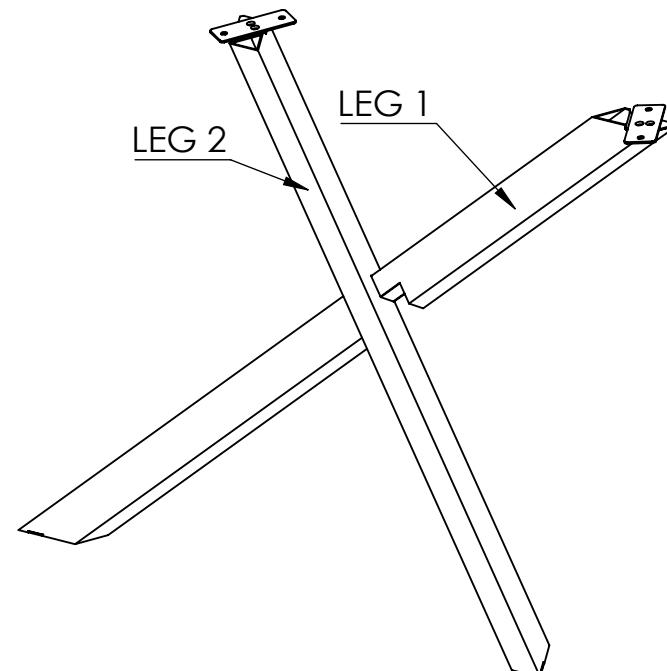
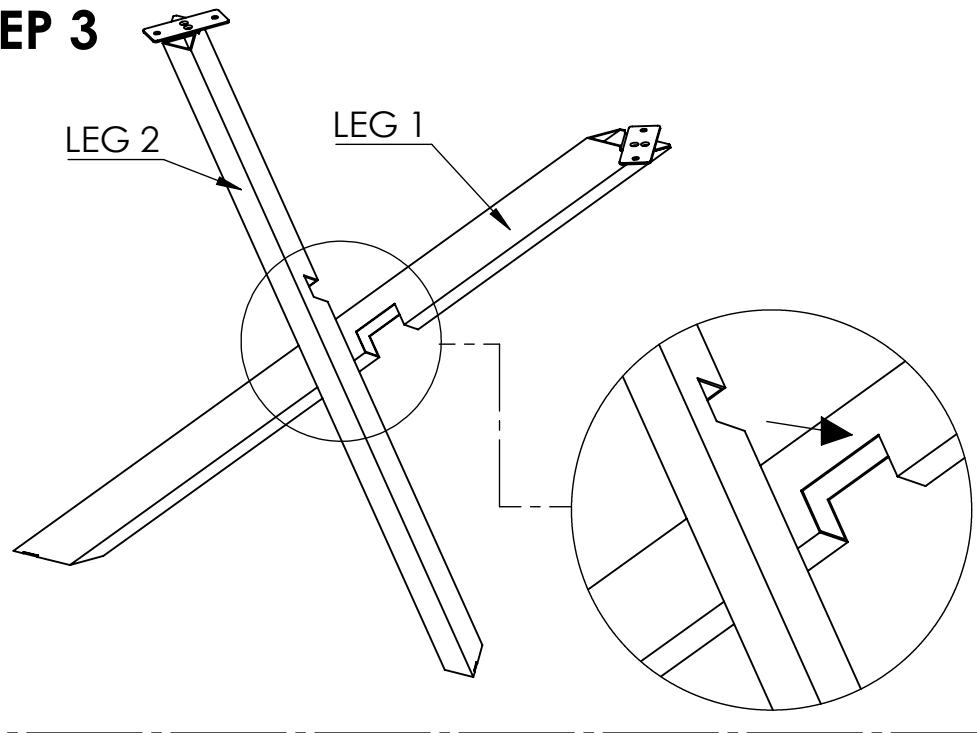


STEP 4

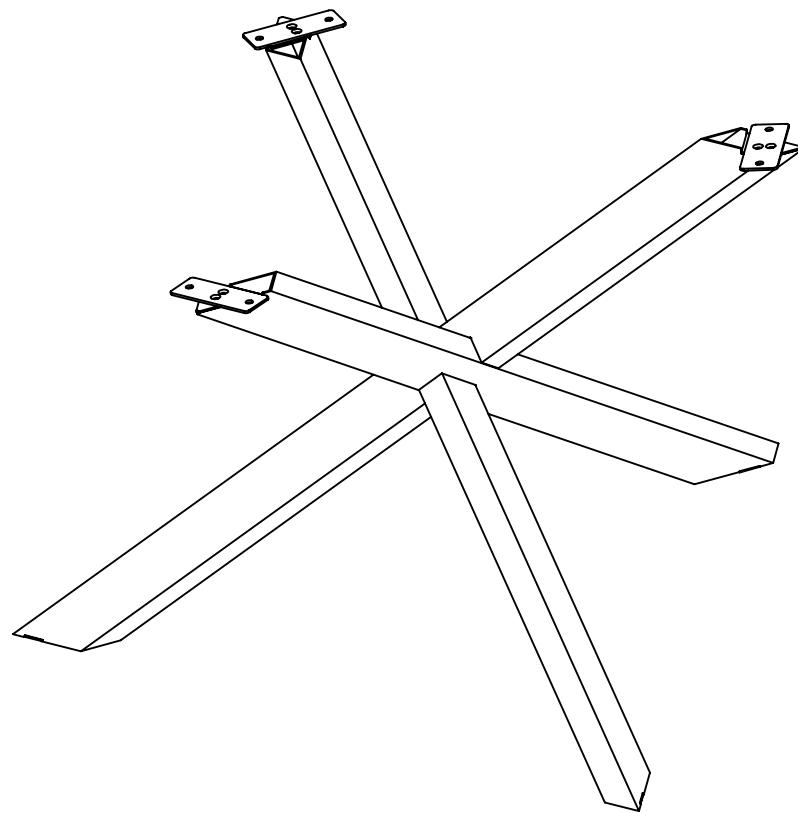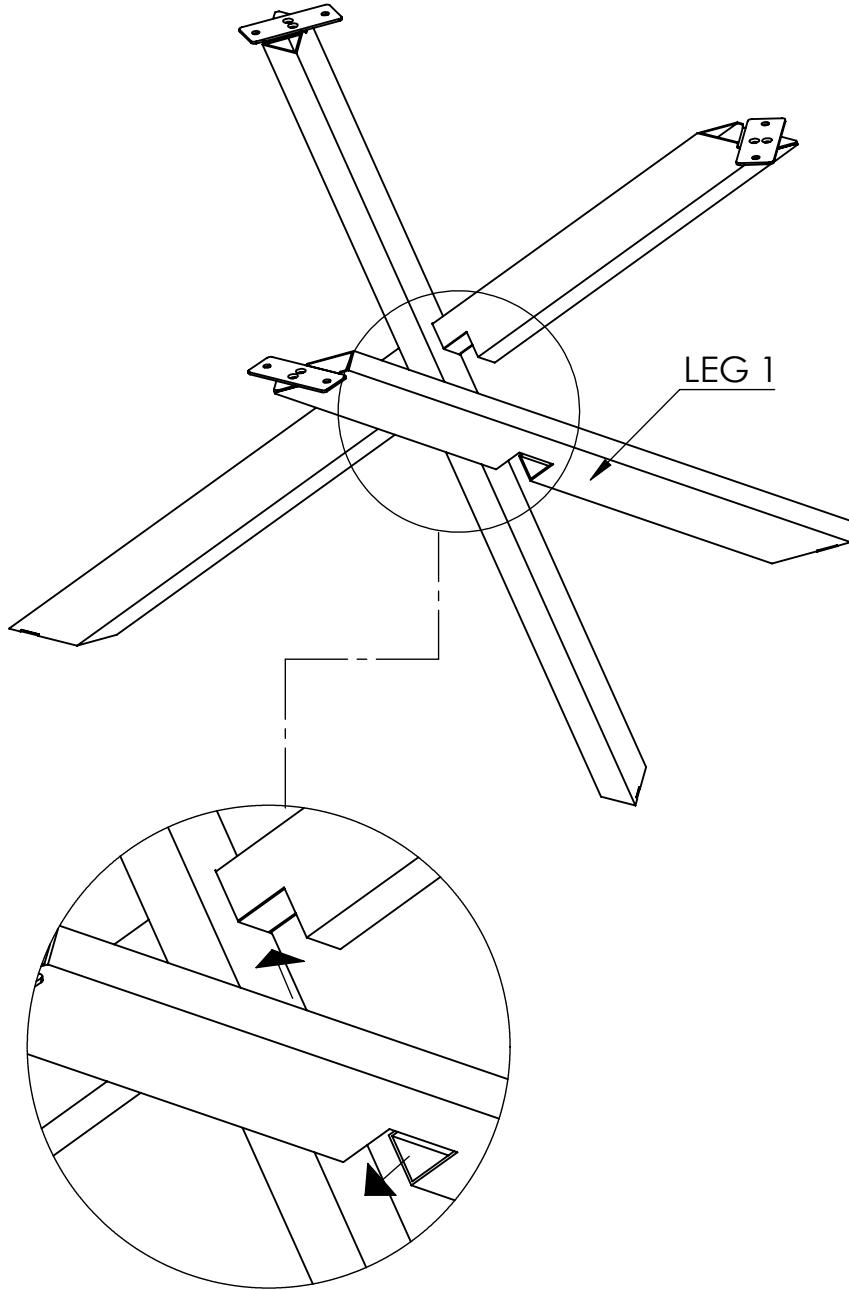


Step 5

1. Place the connector plates following the holes on the top table
2. Tighten the bolt on one leg first, let the other 2 plates free
3. Reset the other 2 plates on their position
4. Tighten all the bolts

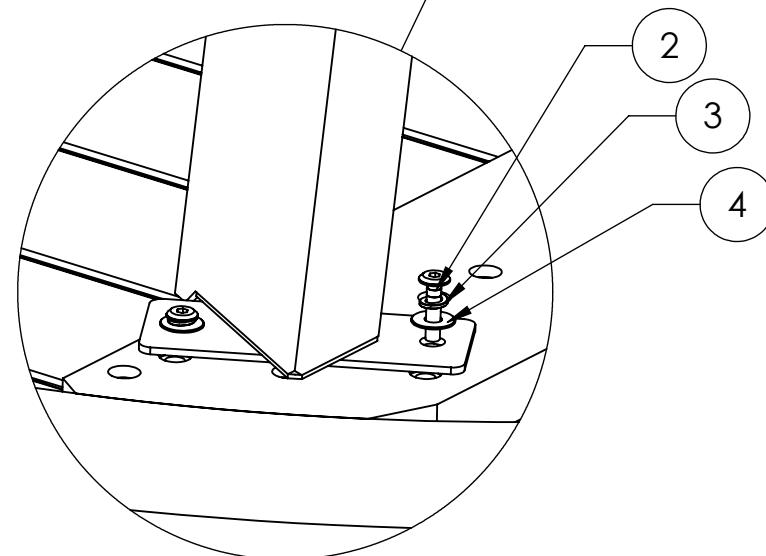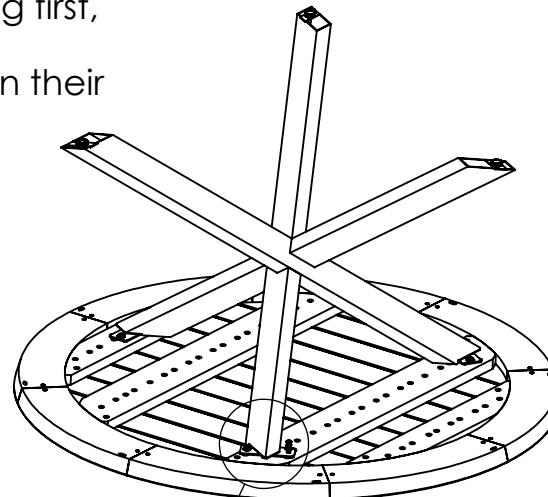

COMPONENT LIST

1		L-KEY	1 PCS
4		JCBC BOLT M6X25	6 PCS
5		SPRING WASHER M6	6 PCS
6		FLAT WASHER M6	6 PCS

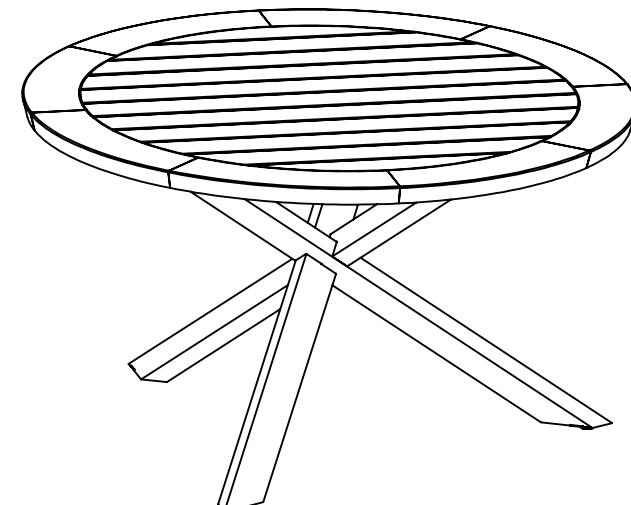

AI-TB-058-00